

ProLine FC 20

NFPA 1851 Compliant



Standard Features


- Gentle drying without mechanical action
- Dries from the inside and outside simultaneously using a dual circulation system
- Programmable control
- 6 detachable hangers are included in the standard design
- Drying capacity of 6 large protective suits
- Program ends with `cool down` to room temperature
- Double overheat protection with backup sensor for increased safety
- Interior lighting
- 71 inches wide which allows for more room between the gear for faster drying
- Easy to navigate programs with display, buttons, and braille
- Adjustable preset start time
- Adjustable feet from the inside of the cabinet
- Powder coated galvanized steel

Optional Fetures

- Detachable racks for gloves
- Detachable racks for boots
- Door hook racks attached on the inside of the door for additional accessories

Humidity Tracking System - HTS

The FC 20 is equipped with the Humidity Tracking System (HTS) with temperature and humidity sensors. Senses the moisture level and interrupts the drying process when the laundry is dry.

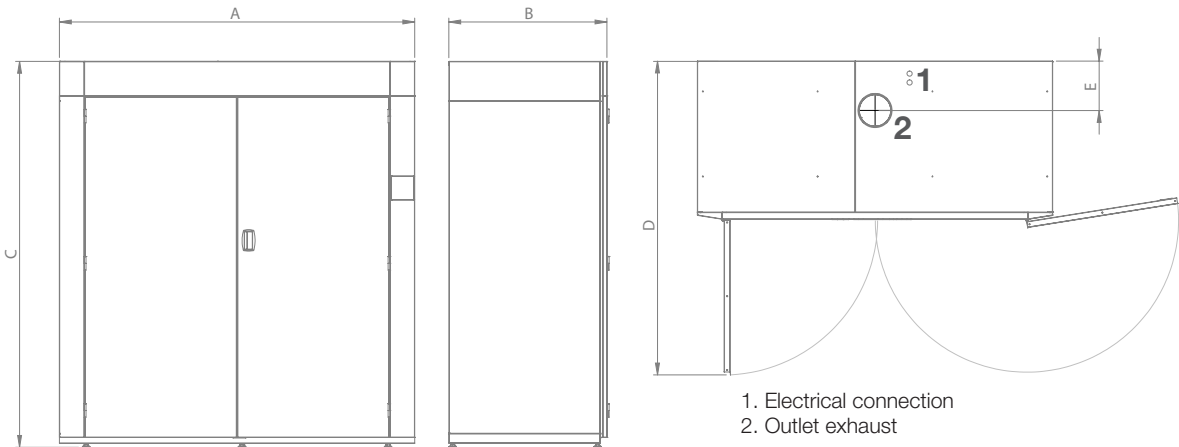

FC 20	A	B	C	D	E	Weight
in	71	31.5	77	62.6	9.84	441 lbs
mm	1800	800	1955	1590	250	200 kg

Machine Type		Drying Cabinet
Product Name		ProLine FC 20
Product No. 3P, 9.45kW electric connection		232001
Product No. 1P, 7.65kW electric connection		232002
Warranty		3 years limited
Main Data		
Type		Air vented
Capacity, sets of turnout gear		6
Capacity (dry weight)	lbs / kg	55 / 25
Interior capacity	cu ft / L	73,1 / 2070
Drying capacity	oz/min / g/min	2 / 55
Energy consumption	kWh	6.7
Noise emission	dB(A)	65
Electrical Installation 3P, 9.45kW		
Supply voltage	V	208-240 V, 3P, 60Hz
Electric heating	kW	9.0
Electric fan	kW	0.45
Total effect	kW	9.45
Protection	A	40
Electrical Installation 1P, 7.65kW		
Supply voltage	V	208-240 V, 1P, 60Hz
Electric heating	kW	7.2
Electric fan	kW	0.45
Total effect	kW	7.65
Protection	A	50
Dimensions		
Outer: width x depth x height	in / mm	71 x 31.5 x 77 / 1800 x 800 x 1955
Weight		
Weight	lbs / kg	441 / 200
Ventilation		
Outlet exhaust	Ø in / mm	6 / 152
Outlet air flow	cfm / m³/h	210 / 350
Pressure drop, max	psf / Pa	4.4 / 210
Maximum air flow (at 0% pressure)	cfm / m³/h	383 / 650
Optional Accessories		
Hooks for drying cabinet door:	Product No.	131071
3 separate rows with 4 hooks on each, 1 set = 1 door		
Hanger for boots	Product No.	131009
Hanger for gloves	Product No.	131008

We are proud to share that our manufacturing plants are quality ISO 9001 and environmentally ISO 14001 certified.