

## Saves energy


TS 63 E is equipped with HTS (Humidity Tracking System) which senses the moisture level and interrupts the drying process exactly when the laundry is dry. TS 63 E consumes only 3.0 kWh / drying cycle.

## Standard features

- HTS - Humidity Tracking System with temperature and humidity sensors
- High temperature programs, greatly reduces bacterial contaminants and allergens
- Microprocessor control with manual and automatic modes
- Hanging rail rotates out 180° and doors open 190°
- Double overheat protection with backup sensor for increased safety
- Electric heated
- Fast and efficient drying times
- Interior lighting
- Easy to navigate programs with display, buttons and braille
- Four automatic drying programs and one timed program
- Adjustable preset start time
- Adjustable feet from the inside of the cabinet
- Powder coated galvanized steel

## Optional features

- Single hanging bar
- Door hook racks attached on the inside of the door for additional accessories

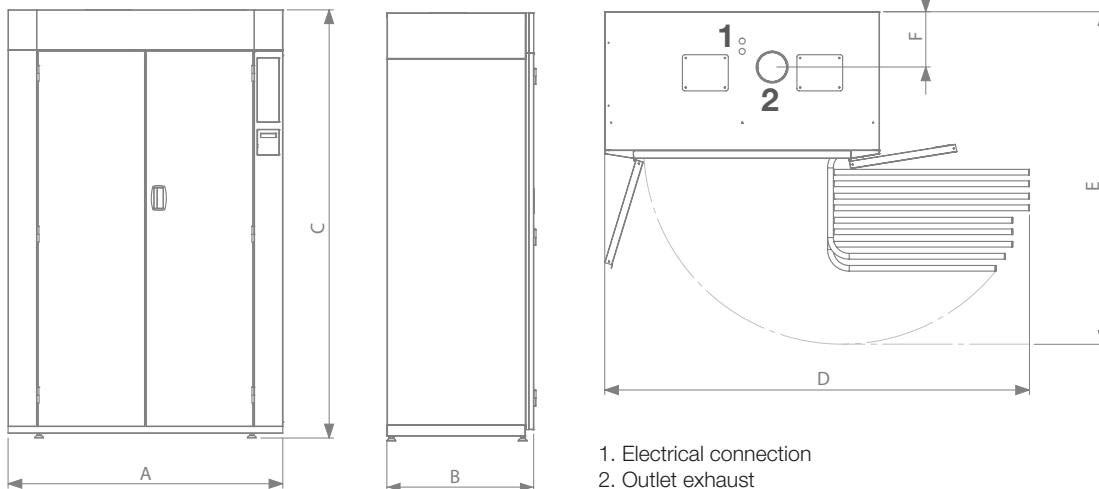

TS 63 E	A	B	C	D	E	F	Weight
in	47.2	25.1	73.6	73	57.2	9.5	320 lbs
mm	1200	638	1870	1855	1453	242	145 kg

<b>Machine Type</b>		<b>Drying Cabinet</b>	
<b>Product Name</b>		<b>ProLine TS 63 E</b>	
Product No. 3P electric connection		234001	
Product No. 1P electric connection		234002	
Warranty		3 years limited	
<b>Main Data</b>			
Type		Air vented	
Hanging length	ft / m	52.5 / 16	
Capacity (dry weight)	lbs / kg	22 / 10	
Interior capacity	cu ft / L	34.7 / 983	
Drying capacity	oz/min / g/min	2.2 / 62	
Energy consumption	kWh	3.0	
Languages		8	
Noise emission	dB(A)	62	
Prepared for payment system		Standard	
Reversible hanging rack		Standard	
<b>Electrical Installation 3P</b>			
Supply voltage	V	208-240 V, 3P, 60Hz	
Electric heating	kW	6.0	
Electric fan	kW	0.3	
Total effect	kW	6.3	
Protection	A	30	
<b>Electrical Installation 1P</b>			
Supply voltage	V	208-240 V, 1P, 60Hz	
Electric heating	kW	4.5	
Electric fan	kW	0.3	
Total effect	kW	4.8	
Protection	A	30	
<b>Dimensions</b>			
Outer: width x depth x height	in / mm	47 x 25.2 x 74 / 1200 x 640 x 1870	
Shipping dimensions: width x depth x height	in / mm	49 x 28 x 81 / 1250 x 700 x 2050	
<b>Weight</b>			
Weight	lbs / kg	320 / 145	
Shipping weight	lbs / kg	351 / 159	
<b>Ventilation</b>			
Outlet exhaust	Ø in / mm	6 / 152	
Outlet air flow	cfm / m³/h	135 / 230	
Pressure drop, max	psf / Pa	1.46 / 70	
Maximum air flow (at 0% pressure)	cfm / m³/h	200 / 340	
<b>Optional Accessories</b>			
Single bar	Product No.	131070	
Hooks for drying cabinet door: 3 separate rows with 4 hooks on each, 1 set = 1 door	Product No.	131071	

We are proud to share that our manufacturing plants are quality ISO 9001 and environmentally ISO 14001 certified.