

Saves energy


TS 93 E is equipped with HTS (Humidity Tracking System) which senses the moisture level and interrupts the drying process exactly when the laundry is dry. TS 93 E consumes only 6.4 kWh / drying cycle.

Standard features

- HTS - Humidity Tracking System with temperature and humidity sensors
- High temperature programs, greatly reduces bacterial contaminants and allergens
- Microprocessor control with manual and automatic modes
- Hanging rail rotates out 90° and doors open 190°
- Double overheat protection with backup sensor for increased safety
- Electrically heated
- Fast and efficient drying times
- Interior lighting
- Easy to navigate programs with display, buttons and braille
- Four automatic drying programs and one manual timed program.
- Adjustable preset start time
- Adjustable feet from the inside of the cabinet
- Powder coated galvanized steel
- Low energy consumption

Optional features

- Single hanging bar
- Door hook racks attached on the inside of the door for additional accessories

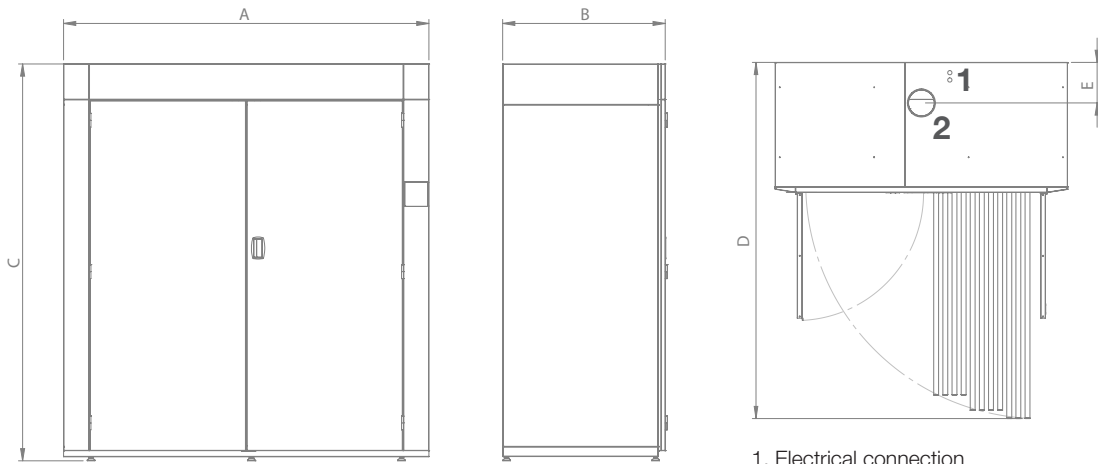

TS 93 E	A	B	C	D	E	Weight
in	71	31.5	77	204	9.84	518 lbs
mm	1800	800	1955	2192	250	235 kg

Machine Type		Drying Cabinet	
Product Name		ProLine TS 93 E	
Product No. 3P electric connection		233001	
Product No. 1P electric connection		233002	
Warranty		3 years limited	
Main Data			
Type		Air vented	
Hanging length	ft / m	105 / 32	
Capacity (dry weight)	lbs / kg	40 / 18	
Interior capacity	cu ft / L	73,1 / 2070	
Drying capacity	oz/min / g/min	2.9 / 81	
Energy consumption	kWh	6.4	
Languages		8	
Noise emission	dB(A)	65	
Prepared for payment system		Standard	
Reversible hanging rack		Not available	
Electrical Installation 3P			
Supply voltage	V	208-240 V, 3P, 60Hz	
Electric heating	kW	9.0	
Electric fan	kW	0.45	
Total effect	kW	9.45	
Protection	A	40	
Electrical Installation 1P			
Supply voltage	V	208-240 V, 1P, 60Hz	
Electric heating	kW	7.2	
Electric fan	kW	0.45	
Total effect	kW	7.65	
Protection	A	50	
Dimensions			
Outer: width x depth x height	in / mm	71 x 31.5 x 77 / 1800 x 800 x 1955	
Shipping dimensions: width x depth x height	in / mm	75 x 31 x 42 / 1915 x 790 x 1060	
Weight			
Weight	lbs / kg	518 / 235	
Shipping weight	lbs / kg	606 / 275	
Ventilation			
Outlet exhaust	Ø in / mm	6 / 152	
Outlet air flow	cfm / m³/h	210 / 350	
Pressure drop, max	psf / Pa	5.43 / 260	
Maximum air flow (at 0% pressure)	cfm / m³/h	353 / 600	
Optional Accessories			
Single bar	Product No.	131072	
Hooks for drying cabinet door: 3 separate rows with 4 hooks on each, 1 set = 1 door	Product No.	131071	

We are proud to share that our manufacturing plants are quality ISO 9001 and environmentally ISO 14001 certified.