

The PODAB Fire Dryer FC20



Special interior and programs for turnout gear


Our microprocessor controlled cabinet, FC20 is specially manufactured for drying turnout gear. With an efficient and gentle drying procedure, this dryer has a capacity for 6 sets of turnout gear, making it a necessity for fire departments and other industries.

A large display provides information during the drying process. One system dries the turnout gear from the outside and the other system dries the turnout gear from the inside by directing hot air through the hangers into the garment. PODAB ingenuity brings you a cabinet that has the unique feature of no mechanical action during this operation. This extends the fabric's service life (zippers, reflector tapes, etc.)

HTS...
Humidity Tracking System



Ideal for delicate garments that are not suitable for tumble dryers.



Two heating systems that shorten drying time.

Programs



Three manual programs and three automatic programs feature the Humidity Tracking System (HTS). HTS is our new system that measures the level of humidity every second to determine exactly when the garments are dry. All automatic programs can be set for drying mode and cool down. Programs can also be set for other types of garments and station wear.



Features

- Drying process from the outside and inside
- Adjustable programs
- Drying capacity of 6 large overalls equal to 44lbs.
- Gentle drying without friction
- Up to nine automatic programs
- Indoor lighting
- Detachable hangers and racks for easier handling
- Program ends with "cool down" to room temperature
- Standard recirculation system, hot air
- Delivered as flat-pack to save shipping costs
- Optional hangers to dry gloves and boots
- Optional hangers for other garments and station wear

The PODAB Fire Dryer FC20

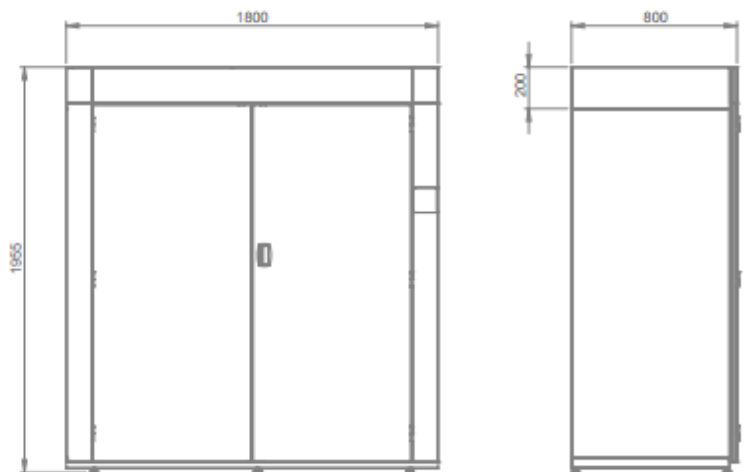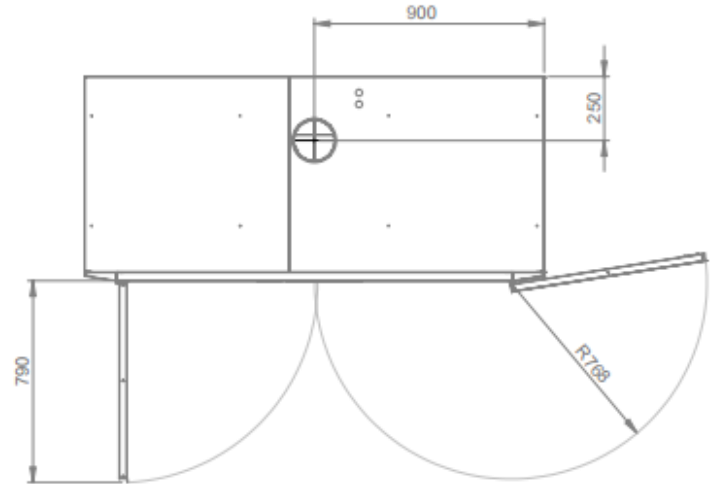

All measurements are in millimeters

Technical Specifications	
Part No.	131035
Capacity, lbs (dry weight)	44
Hanging length, single bar (ft)	N/A*
Hangers	6
Drying time, min*	N/A*
Energy consumption (kw/kg)	N/A*
Total heating effect, kW	12
Voltage**/Frequency/Phase	208-230V / 60Hz / 3
Circuit breaker (amps)	35
Height (in)	77
Width (in)	71
Depth (in)	31.5
Weight (lbs)	441
Evacuated airflow (CFM)	324
Airborne sound level (db)	59
Color	grey

*Not applicable due to different types of gear and material

**Other electrical setup upon request

Optional Extras



Steel racks for gloves and boots.
Hot air is directed into each glove.
(max 4 pairs) or boot (max 2 pairs)
For gloves, Part # 131008
For boots, Part # 131009



Hook rack, set of three
Part # 131071



PODAB, Inc. • 1330 Main Street Unit 2 • Sarasota, Florida 34236 • 941-726-0808 • www.podab.us

Technical data and details are subject to change without notice.

© 2014 PODAB, Inc.